

HT 182 TOPCon
Bifacial Series

640~660W

Main Features

N-TYPE TOPCON TECH

- Lower LID
- Excellent Low Irradiance

SMBB + NON-DESTRUCTIVE CUTTING

- Reduced Internal Current Loss
- Minimized Micro-Crack Impact

HIGH RELIABILITY

- Salt Mist Resistance, Ammonia Resistance, Sand & Dust Resistance
- Anti-PID

HIGH CONVERSION EFFICIENCY

- Up to 23.6%
- Bifaciality Rate Up to 80±5%


SUPERIOR POWER GENERATION PERFORMANCE

- Lower Operating Temperature

LOWER LEVELIZED COST OF ELECTRICITY

- Lower BOS and LCOE
- Higher ROI

Comprehensive Products and System Certificates

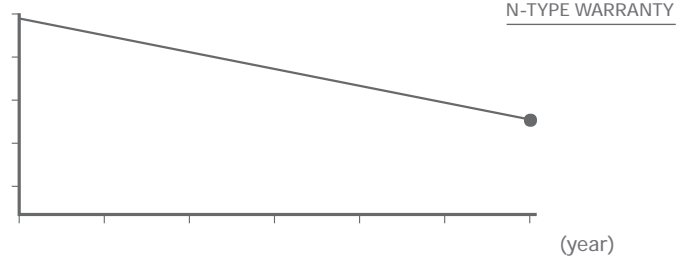

Munich RE

15 YEAR

Product Workmanship Warranty

30 YEAR

Linear Power Warranty

1%

First - year power attenuation

0.4%

Linear power attenuation



HONGYUAN GREEN ENERGY CO.,LTD.

Group Headquarter: Building 7, Changguangxi Wetland Park, Lihu Avenue, Binhu District, Wuxi City, Jiangsu Province, China

Tel:

E-mail: info@hysolar.com

Web: <https://www.hysolar.com>

